




www.atpkg.com



# AT PACKAGING

SALES  SERVICE

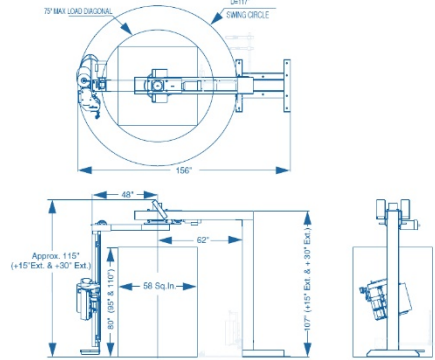

# RTD ROTARY TOWER

**Built for High Performance & Long Life**

**FEATURES:**

- 16 RPM Variable Speed Tower
- No Maximum Load Weight Capacity
- High Performance Film Delivery Carriage
- Floor Mounted Control Panel for Flexibility
- Precision Ring Bearing Drive System
- AC/VFD Motors for Reduced Maintenance
- Structural Steel Construction for Durability
- Heavy Duty Chain & Sprocket Drive
- Tower Mounted Obstacle Sensing System

**PRODUCTION SPEED:**

- Up to 30-40 loads per hour. Based on 80" tall load, 12 revolutions

**MAXIMUM LOAD SIZE:**

- 52"W x 52"L x 80"H (74" Diagonal)

**InstaThread FILM DELIVERY SYSTEM:**

- Film roll: 20" Standard - 30" Optional - 10" Diameter
- Standard prestretch ratio: 260% (higher available)
- Ultra low wrap to within 1.5" of floor
- Automatic load height sensing photoeye
- Automatic film force-to-load control

**WARRANTY:**

- 4 Years on ALL major components
- 5 Years on structural frame

**UTILITIES:**

- 115/1/60, 20 Amp electrical service

