




www.atpkg.com



# AT PACKAGING

SALES  SERVICE

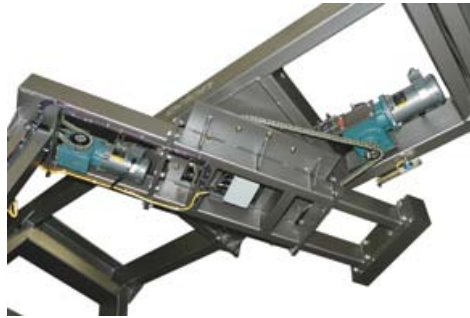

# ROTARY TOWER MA-X

*The highest speeds and most robust frame design*

**FEATURES:**

- “A” Frame high-speed, extra-heavy frame structure
- Fully enclosed slip ring assembly for trouble-free operation
- Rotary tower well-suited for extra light, unstable or heavy loads
- Insta-Thread™ film delivery systems with 260% pre-stretch
- Maximum load weight 4,500 pounds, 6,000 lb. optional
- Automatically adjusts for various load heights
- 30 RPM counter-balanced rotary arm, our fastest automatic system
- Category 2 safety rating including full wire mesh surround fence
- State-of-the-art AB MicroLogix PLC Controller for maximum flexibility
- 30" precision ring bearing with ANSI chain/sprocket drive for ultra-reliability
- Many non-proprietary replacement parts can be purchased locally
- AC Variable Frequency Drive for reliability and easy maintenance
- Durable powder coat paint for super tough finish

**PRODUCTION SPEED:**

- Up to 60-75 (optional to 120) loads/hr\*

**MAXIMUM LOAD SIZE:**

- 48" x 48" (larger available: Factory Quote)

**WARRANTY:**

- 3 Year components, 5 Year frame, Lifetime pre-stretch rollers

**UTILITIES:**

- 480 VAC / 3ph / 60Hz
- 80 PSI @ 6 CFM



*\*Throughput rate calculated on a typical 48" x 48" x 60" H load with 2 top wraps, 2 bottom wraps, 2" film overlap and 3" top film overwrap. Higher throughput speeds require optional upgrades.*