




www.atpkg.com



AT PACKAGING

SALES SERVICE

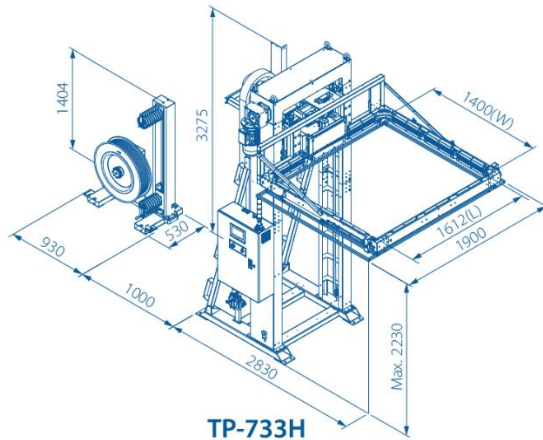

TP-733H



TP733H

The enhanced TP-733H provides accurate strapping output on all natural-sized loads with consistent performance. It maximizes the productivity and minimizes the production cost for users. Designed for simple and quick connection to the master control system, TP-733H can easily fit in various end-of-line packaging sectors. It is your best choice for fully automatic operation in various applications, including palletized products, home appliance, bricks & blocks, produce industry, etc...

FEATURES:

- TP-733-SH Strapping head
- Index strapping head
- Strap guide arm
- Safety rack
- Friction weld sealing technology
- Siemens PLC and HMI
- Free access to strap guides
- Swivel dispenser set
- Adjustable sealing and cooling time
- Strap end ejector
- Preprogram setting
- Easy to retrofit

OPTIONS:

- Floating Head
- Free standing operation desk
- Light tower with low strap sensor
- Dual Channel E-Stop
- Lower tension range (200 - 1200 N)
- HMI and PLC mounted on the opposite side
- Auto strap program selecting (BCD input)
- No safety rack
- 200 mm / 280 mm strap dispenser
- Uplifted support

TECHNICAL DATA:

- Capacity: Up to 60 pallets/hour (3 parallel straps)
- Strap Type: PP or PET strapping
- Strap Width: 12 mm, 15.5 mm, or 19 mm
- Tension Range: 1100 - 3200 N (standard)
- Min. Strapping Height:
 - With conveyor: 160 mm above conveyor surface
 - Without conveyor: 240 mm above floor
- Max. Package Height: 2200 mm
- Strap Core Size: 406 mm
- Pneumatic Source: 6 bar
- Air Consumption: 7.1 liters/cycle
- Electrical Requirements: 220V, 380V, 400V, 415V
50/60Hz 3PH